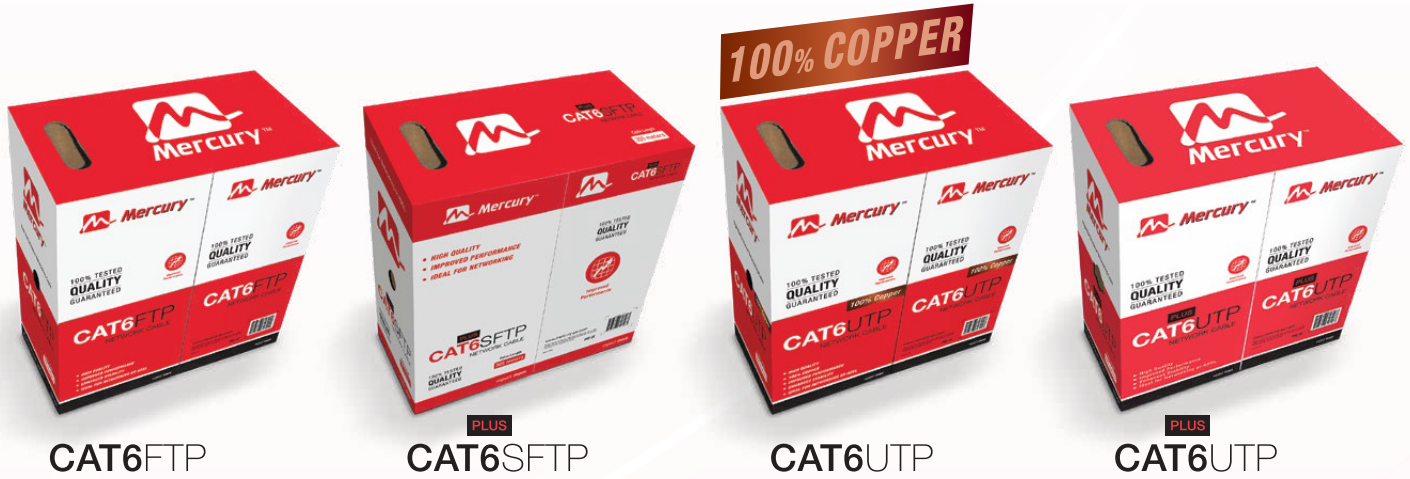


**High Performance**

# NETWORK LAN CABLE

- **HIGH QUALITY**
- **IMPROVED PERFORMANCE**
- **ENHANCES STABILITY**
- **IDEAL FOR NETWORKING OR ADSL**

100% TESTED  
**QUALITY**  
GUARANTEED


**CAT6FTP**
**PLUS  
CAT6SFTP**
**CAT6UTP**
**PLUS  
CAT6UTP**

## Technical Details



| PRODUCT & SPEC. |                         | CAT6 FTP        | CAT6 Plus SFTP  | CAT6 UTP        | CAT6 Plus UTP   |
|-----------------|-------------------------|-----------------|-----------------|-----------------|-----------------|
|                 |                         | 4P              | 4P              | 4P              | 4P              |
| CONDUCTOR       | Configuration           | 4X2X0.57±0.01mm | 4X2X0.57±0.01mm | 4X2X0.54±0.01mm | 4X2X0.57±0.01mm |
|                 | Material                | CCA             | CCA             | BC              | CCA             |
| INSULATION      | Material                | HDPE            | HDPE            | HDPE            | HDPE            |
|                 | PE OD                   | 0.94-0.95mm     | 0.94-0.95mm     | 0.94-0.95mm     | 0.94-0.95mm     |
| CROSS CENTER    | Material                | PE              | PE              | PE              | PE              |
| SHIELD          | Mylar                   | yes             | yes             | No              | No              |
|                 | Aluminum                | yes             | yes             | No              | No              |
|                 | Braid                   | No              | 112 x 0.12      | No              |                 |
| PACKAGE         | Gift box size           | 39*39*20cm      | 43*43*20cm      | 37.5*37.5*20cm  | 37.5*37.5*20cm  |
|                 | Package                 | 305m/box        | 305m/box        | 305m/box        | 305m/box        |
|                 | Outercarton size        | 42*40.5*41cm    | 43*44*45cm      | 42*39*39.5cm    | 42*39*39.5cm    |
| SKIN            | Material                | PVC             | PVC             | PVC             | PVC             |
|                 | Color                   | Light grey      | Light grey      | Dark grey       | Light grey      |
|                 | PVC thickness           | 0.6mm           | 0.7mm           | 0.6mm           | 0.6mm           |
|                 | PVC OD                  | 6.3 mm          | 6.7 - 6.8 mm    | 6.0 mm          | 6.0 mm          |
|                 | Surface                 | Smooth          | Smooth          | Smooth          | Smooth          |
| PERFORMANCE     | Resistance 100M at 20°C |                 |                 |                 |                 |
|                 | Current (A)             | ≤3 0            | ≤3 0            | ≤3 0            | ≤3 0            |
|                 | Voltage (V)             | ≤3 0V           | ≤3 0V           | ≤3 0V           | ≤3 0V           |
|                 | Working Temperature     | -25°C--+ 65°C   | -25°C--+ 65°C   | -25°C--+ 65°C   | -25°C--+ 65°C   |



**RG-59**  
COAXIAL  
WITH POWER  
(305 mtrs)

Coax: 20AWG CCS  
Coverage: 80%  
Power: 2x0.5mm<sup>2</sup>  
305m wooden drum